


**TIME – TEMPERATURE DISPLAYS
4 x 7 MATRIX**

STANDARD FEATURES

- Standard 12-hour clock (24-hour available)
- Temperature programmable for degrees F or C or both
- Simple keyboard controller inside display or can be mounted remote
- Dimming or on-off times available through photocell or by programming the controller
- Battery holdover eliminates need to reset clock after power failures
- 4 x 7 rounded style matrix
- 30 different on and off modes individually programmable such as: change, spell, zoom, slide, roll, slot machine, interlace or random
- Programmable mode speeds
- Available in red or amber
- Single-sided, double-sided, or multi-sided with separate slave units
- Automatic daylight savings time correction

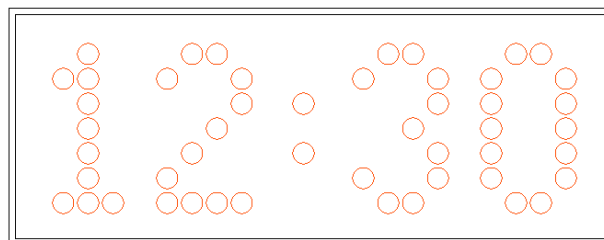

Model	Character Height	Box Size	Power per Face
LEDTT12	12"	18" x 43" x 5"	65 Watts
LEDTT16	16"	22" x 56" x 5"	85 Watts
LEDTT21	21"	27" x 72" x 6.75"	150 Watts
LEDTT24	24"	30" x 82" x 6.75"	150 Watts
LEDTT32	32"	36" x 100" x 6.75"	185 Watts
LEDTT36	36"	40" x 113" x 6.75"	185 Watts
LEDTT42	42"	48" x 132" x 6.75"	185 Watts
LEDTT47	47"	52" x 148" x 6.75"	340 Watts

Note:

LEDTT21 to LEDTT47 please allow an additional 3.25" to the depth of the cabinet for cooling fans.